



TO BE THE GLOBAL **NO.1** BRAND ON COMPUTER PERIPHERALS

www.vcom.com.hk



www.vcom.com.hk

VCOM INTERNATIONAL LTD.

Head Quarter
>1/2F, Building D, Youke Business Center, Kexin Rd, Tangxia, Tianhe District,
Guangzhou City, Guangdong Province, China
Tel: +86-20-88525625 Fax: +86-20-88525625 Email: vcom@vcom.hk

Cable & Electronic Factory
>Xiaopengang Industrial Zone, Longxi Town, Boluo District, Huizhou City,
Guangdong Province, China
Tel: +86-752-6873123 Fax: +86-752-6873155



ABOUT US

VCOM INTERNATIONAL LTD is one of the subsidiaries of VCOM Group. It was founded in 2004, located in Guangzhou China. It is professional in intelligent building cabling system. We are a collectivization enterprise with R&D, sales and service. We have three production bases, which are located in Dongguan, Huizhou and Fuzhou Jiangxi.

We have independent intellectual property rights of VCOM brand. After years of continuous development and innovation, VCOM has become integrated cable industry recognized as the most valuable international brand. VCOM has a high reputation in domestic and abroad. We have branches in major cities in China, and have agents in more than 98 countries in the world. Relying on powerful R&D team and production technology, we have developed Cat5e UTP, FTP, SFTP and Cat6 systems, Cat7 cabling system, coaxial CCTV system, telephone voice system, audio and video teaching system and so on. The SFTP Cat5e cable structure has obtained China national practical patent. VCOM has passed the international ISO9001 (2000) quality system certificate, our products passed the UL, CE, VDE certificates and China 3C certification.

VCOM takes the concept of win-win cooperation, continues to expand and deepen the business channels. We set up branches or agents not only in China but in all over the world. We established a perfect sales and after-sales service system, to promote VCOM brand powerful. With stable quality and good reputation, excellent market achievements for successive years, VCOM have all kinds of industry users and supports. VCOM cabling system products have been widely used in the financial, medical, university, airports, sea ports and train stations and other various of industries project.

VCOM International LTD, will do more detailed market analysis and surveys to develop more user-friendly products and solutions. We are continuously to make contribution to the development of industry by our own strengths.

Founded:
1994

Countries:
102

Agents:
270

2024

At the 47th WorldSkills Competition, Vcom Education providing comprehensive equipment and technical support for four skill competitions

2021

VCOM Strategic Cooperation with SIEMENS, LENOVO and NIPPON! INTSkill-Global Training Center, Core Sponsor of WorldSkills 2022.

2020

VCOM went to public and honored as the senior partner of the 1st Vocational Skills Competition of the PRC. Also, VCOM as declared unit of "Photoelectric Technology" project - WorldSkills

2017

VCOM is honored with Core sponsor of WorldSkills 2017 & 2019 and becomes global partner in 2018

2013


VCOM Established North, Central, South China Service Centers, and 5 Production Centers

2002

VCOM entered international market and built VCOM Brand

1994

VCOM Established in Dongguan

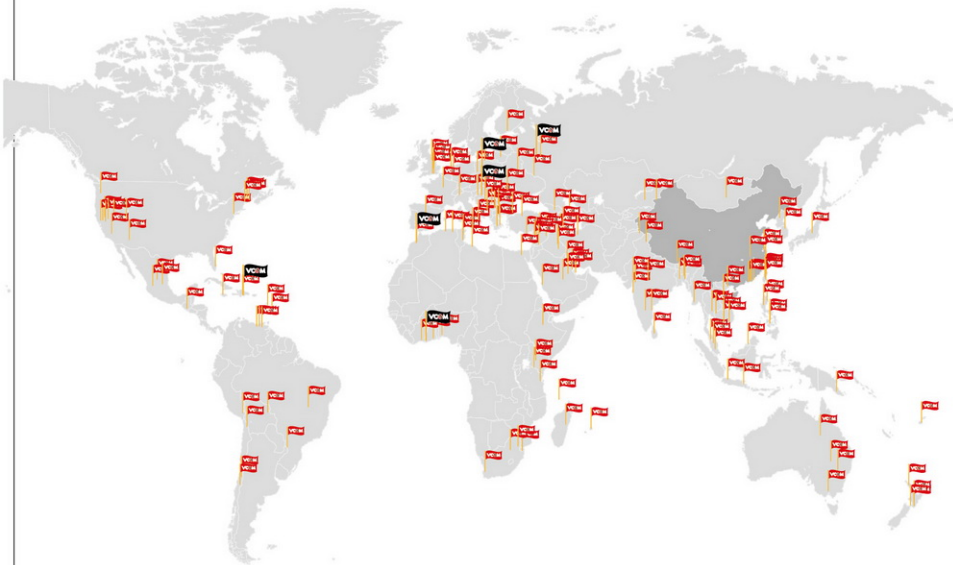

CORE VALUE OF VCOM BRAND

Brand target: to be the global NO.1 brand on computer peripherals
 Brand character: over-value
 Slogan: Beyond your imagination
 Brand positioning: one-stop supplier for global computer peripherals
 Service positioning: an entire consultative and exhaustive service

DISTRIBUTE VCOM BRAND PRODUCTS

VCOM is a rapid developing brand, we have distributors /agents in 98 countries up till now. We would like to work with you to develop your local market, move forward together to a brilliant prospect. Contact us now!
vcom@vcom.hk

CONTENTS

01

Computer Cables

Active Optical Cable.....	01
NEW 8K Aluminum alloy Series.....	05
HDMI Cable.....	09
Display Port Cable.....	13
DVI Cable.....	17
VGA Cable.....	18
Audio/Video Converter.....	19
Toslink Cable.....	23
Adapter.....	24
USB Cable.....	27
PC Internal SATA Cable.....	29
Power Cable.....	29

02

Network System

Network Cable.....	31
Patch Cord.....	32
Network Accessories & tools.....	35
Cabinet.....	37

03

USB Type C Series

USB4 Cable.....	39
USB-C Data Cable.....	42
USB-C Dongle.....	44
USB-C Docking.....	47
USB-C HUB.....	51
Multi-screen/Card Reader.....	54
SSD Enclosure.....	56

NEW-TECH POLISHED FIBER HDMI CABLE

Engineering Renovation Grade



- 4K**
60Hz
- 18**
GBPS
- 300M**
Transmission
- HDCP**
2.2
- 3D**
3D MAX
- ARC**



D3742P

HDMI 19 M/M Cable 2.0V Active Optical Cable

Support 18Gbps, 4K @ 60HZ
OD:4.8mm, Black
10m/20m/50m/800m/100m/200m



D3742CH

USB Type CM to HDMI AM Active Optical Cable

Support 18Gbps, 4K @ 60HZ
OD:4.7mm, Black
1m/5m/15m/35m

ACTIVE OPTICAL CABLE



D3742A

HDMI 19 M/M Cable

Active optical cable support HDMI 2.0V

Support 18Gbps,HDCP 2.2/CEC/EDID/HDR,
The maximum support 4K @ 60Hz,
No external power supply is required,
24K Gold Plated connector , Metal shell, Silver,
OD:4.8 mm black
15m/20m/30/40/50m/80m/100m/150m/200m



D3742C

HDMI 19 M/M Cable

Active optical cable support HDMI 2.0V

Support 18Gbps,HDCP 2.2/CEC/EDID/HDR,
The maximum support 4K @ 60Hz,
No external power supply is required,
24K Gold Plated connector , Metal shell, Silver,
OD:4.8 mm black
15m/20m/30/40/50m/80m/100m/150m/200m



D3742D

HDMI A/D M to A/D M Removable connector

AOC (Active optical cable) Support HDMI 2.0V
Bandwidth up to 18Gbps, HDCP 2.2/CEC/EDID/HDR,
The Maximum Support 4K @ 60Hz,
No External Power Supply is Required,
24K Gold Plated Connector , Metal Shell,
OD:4.70mm black
15m/20m/30/40/50m/80m/100m/150m/200m





D3743

HDMI 19 M/M Cable

Active optical cable support HDMI 2.1V.
Bandwidth up to 48Gbps. Ethernet, 3D,
HDCP 2.2,HDR, Support 8k@60Hz/4k@120Hz,
24K Gold plated Connector,metal hood,black
3m/5m/10m/15m/20m/30m/40m/50m



AOC Display Port Cable 1.4V



D3751

Display Port Cable 1.4V

Display port M/M AOC support 1.4V,
total bandwidth:32Gbps/8k@60Hz 4K@144Hz,
4K/120Hz,Support HDR3,HDCP2.2/CEC/EDID,
24K Gold plated Connector,OD:4.8mm, Black
3m/5m/10m/15m/20m/25m/30m/40m/50m



10G AOC USB3.2



D3730

Ultra-Long AOC USB 3.2 Extension Cable

A male to A Female Fiber Optical Cable .
Micro USB2.0 Power Supply Interface,
10Gbps Data Transfer Extender Cord, OD4.2mm ,PVC jacket

Compatibility with USB 3.0 devices and is backward compatible
with USB 2.0 standard devices. Compatible with printers, scanners,
webcams, video cameras, Playstations, hard drives,
card readers and more. If you need to connect mouse or keyboard,
you need to use it with USB HUB.
15m/20m/30m/40m/50m

DVI Multimedia Fiber Optical Cable



D3740

**DVI(24+1)M to DVI(24+1)M
Active Optical Cable**

Support 1080P@60Hz,
24K Gold Plated connector,Metal shell,
OD:4.70mm, black
15m/20m/30m/40m/50m

NEW CABLE

Aluminum alloy Series

4K
ULTRA HD

8K
ULTRA HD

Private Mold Design

CU422MV-8K

USB Type C to DP

Connector 1: USB C Male
Connector 2: DP Female

Resolution: Max 8K UHD 8K@60Hz/4K@120Hz/2K@144Hz
Aluminum Shell
0.15m



CU423MV-8K

USB Type C to HDMI A/F

Connector 1: USB C Male
Connector 2: HDMI Female

Resolution: Max 8K UHD 8K@60Hz/4K@120Hz/2K@144Hz
Aluminum Shell
0.15m



CU422MV-4K

USB Type C to DP

Connector 1: USB C Male
Connector 2: DP Female

Resolution: Max 4K UHD 3840*2160@60Hz
Aluminum Shell
0.15m

CU423MV-4K

USB Type C to HDMI A/F

Connector 1: USB C Male
Connector 2: HDMI Female

Resolution: Max 4K UHD 3840*2160@60Hz
Aluminum Shell
0.15m

CG516M

HDMI A/M 2.1V

Connector 1: HDMI A Male
Connector 2: HDMI A Male

Bandwidth up to 48Gbps, Ethernet,
3D_eARC, HDCP 2.2, HDR,
Support 8K@60Hz/4K@120Hz/2K@144Hz
0.3m/1m



CG635F

Display port M/F 1.4V Extension

Connector 1: DP A Male
Connector 2: DP A Female

Bandwidth up to 32Gbps
8K@60Hz/4K@120Hz
Support HBR3, HDCP2.2/CEC/EDID
0.3m/1m



CG685F

MiniDP/M to DP/F Extension 1.4V

Connector 1: Mini DP Male
Connector 2: DP Female

Bandwidth: 32Gbps
8K@60Hz/4K@120Hz
Support HBR3, HDCP2.2/CEC/EDID
0.3m/0.5m



New Series



CG865

HDMI AM/AM 2.1V

Bandwidth up to 48Gbps, Ethernet ,
3D, HDCP 2.2, HDR, Support 8k@60Hz/4k@120Hz,
24K Gold plated Connector, silver
Metal Shell, Black cotton net braid
1.5m/1.8m/3m/5m/10m



CG635

Display Port Cable 1.4V

Display port M/M 1.4V,
total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
Support HBR3, HDCP2.2/CEC/EDID,
24K Gold plated Connector, silver Metal Shell,
Black cotton net braid
1.5m/1.8m/3m/5m/10m



CG665

Mini DP Cable 1.4V

MiniDP M to miniDP M, 1.4V,
total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
Support HBR3, HDCP2.2/CEC/EDID,
24K Gold plated Connector, silver Metal Shell,
Black cotton net braid
1.5m/1.8m/3m



CG685

Mini DP to DP Cable 1.4V

MiniDP M to DP M, 1.4V,
total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
Support HBR3, HDCP2.2/CEC/EDID,
24K Gold plated Connector, silver Metal Shell,
Black cotton net braid
1.5m/1.8m/3m



CG608M

DP/HDMI

Display port M/HDMI AM
4K@60Hz, 24K Gold plated Connector,
silver Metal Shell, Black cotton net braid
1.5m/1.8m/2m/3m



CU560

USB4 Cable

USB C/M to C/M Cable with IC USB4,
40Gbps, PD 240W, silver Metal Shell,
Black cotton net braid
1m/1.2m



CU423MCV

USB Type C to HDMI Cable

USB Type C to HDMI/M cable 4K@60Hz,
Gold plated, silver Metal Shell,
Black cotton net braid
1.8m/3m



CU422MCV

USB Type C to DP Cable

USB Type C to DP/M cable 4K@60Hz,
Gold plated, silver Metal Shell,
Black cotton net braid
1.8m/3m

HDMI CABLE

HDMI (high-definition multimedia interface) is the first and only industry-supported, uncompressed, all-digital audio/video interface. By delivering crystal-clear, all-digital audio and video via a single cable, HDMI dramatically simplifies cabling and helps provide consumers with the highest-quality home theater experience. HDMI provides an interface between any audio/video source, such as a set-top box, DVD player, or AV receiver and an audio and/or video monitor, such as a digital television (DTV), over a single cable.



CG525-R

HDMI AM/AM 2.0V (4K@60Hz HDMI)

Support ethernet, 3D, Bandwidth speed of up to 18GBps,
Support 1920*1080@60Hz; 3840*2160@60Hz,
Up to 32 audio channels, 21:9 video aspect ratio, HDR

24K Gold plated Connector, Support Ethernet
1.5m/1.8m/3m/5m/10m /15m/20m/25m/30m



CG525-R

HDMI AM/AM 1.4V (4K@30Hz HDMI)

Support 1920*1080@60Hz(Support 3D@24Hz),
3840*2160@30Hz, 4096*2160@24Hz,

24K Gold plated Connector, Support Ethernet
1.5m/1.8m/3m/5m/10m /15m/20m/25m/30m/40m

BEST SELLER
BULK DISCOUNT



CG525

PANTHER Series HDMI Cable 2.0V

CG517

HDMI AM/AM 2.0V

Support ethernet, 3D, Bandwidth speed of up to 18GBps,
Support 1920*1080@60Hz, 3840*2160@60Hz,
Up to 32 audio channels, 21:9 video aspect ratio, HDR,
24K Gold plated Connector, black, Standard 2.0V,
1.5m/1.8m/3m/5m/10m /15m/20m/25m/30m



CG583

HDMI AM/mini HDMI M 2.0V (4K@60Hz HDMI)

24K Gold plated Connector, black
1.5m/1.8m



CG587

HDMI AM/micro HDMI M 2.0V (4K@60Hz)

24K Gold plated Connector, black
1.5m/1.8m



CG526-B

HDMI AM/AM 2.0V

Support ethernet, 3D, Bandwidth speed of up to 18Gbps,
Support 1920*1080@60Hz; 3840*2160@60Hz,
Up to 32 audio channels, 21:9 video aspect ratio, HDR

24K Gold plated Connector, metal hood,
Plus Nylon Braid, Black (Standard 2.0V)
1.5m/1.8m/3m/5m/10m/15m/20m/25m/30m

CG864

HDMI AM/AM 2.1V

Bandwidth up to 48Gbps, Ethernet , 3D, HDCP 2.2,
HDR, Support 8k@60Hz/4k@120Hz
24K Gold plated Connector
Black cable
Metal Shell, 1.5m/2m/3m



CG860

HDMI AM/AM 2.1V

Bandwidth up to 48Gbps, Ethernet , 3D, HDCP 2.2,
HDR, Support 8k@60Hz/4k@120Hz,
24K Gold plated Connector, metal hood, black
1.5m/2m/3m



CG805

HDMI AM/AM 2.1V

Bandwidth up to 48Gbps, Ethernet , 3D, HDCP 2.2,
HDR, Support 8k@60Hz/4k@120Hz
24K Gold plated Connector
Black cable
Two-color PVC molding
1.5m/2m/3m




CG862

HDMI AM/AM 2.1V

Bandwidth up to 48Gbps, Ethernet ,
3D, HDCP 2.2, HDR, Support 8k@60Hz/4k@120Hz,
24K Gold plated Connector, black
Metal Shell, Black braid
1.5m/2m/3m



ENJOY 16K VISUAL EXPERIENCE

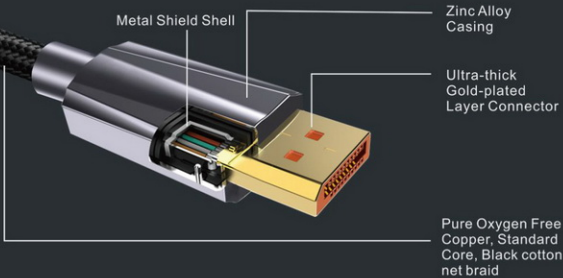

CG655

DisplayPort 2.1 DP80 Cable

total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
 Support HBR3, HDCP2.2/CEC/EDID,
 24K Gold plated Connector,
 Metal Shell,1m/1.5m/2m
 UHBR20, FSDP (Full Size DP) Cable.
 Bandwidth: 80Gbps, supports 16K@60Hz/4K@240Hz/
 8K@60Hz/4K@120Hz/2K@240Hz
 supports HBR3, HDCP2.2/CEC/EDID/MST,
 gold-plated connectors, Metal Shell,Black Cotton Net Braid
 Backward compatible with DisplayPort 1.4 and 1.2 cables.



CG634

Display Port Cable 1.4V

total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
 Support HBR3, HDCP2.2/CEC/EDID,
 24K Gold plated Connector,
 Metal Shell,1.5m/2m/3m



CG622

Display port M/M 1.4V

Bandwidth up to : 32Gbps
 8k@60Hz/ 4K@140Hz
 Support HBR3, HDCP2.2/CEC/EDID
 24K Gold plated Connector
 Black cable
 Two-color PVC molding
 1.5m/2m/3m



DISPLAY PORT CABLE

Display Port is a digital display interface developed by the Video Electronics Standards Association (VESA). The interface is primarily used to connect a video source to a display device such as a computer monitor, though it can also be used to transmit audio, USB, and other forms of data. The VESA specification is royalty-free. VESA designed it to replace VGA, DVI, and LVDS by creating a high performance standard. Backward compatibility to VGA and DVI by using adapter dongles enables consumers to use Display Port fitted video sources without replacing existing display devices. Although Display Port supports much of the same functionality as HDMI, it is expected to complement the interface, not replace it.



CG651
DisplayPort 2.1 DP40 Cable
(with Latch)

UHBR10, FSDP(Full Size DP) Cable,
Bandwidth:40Gbps Support 8K@60Hz /4K@120Hz/
2K@240Hz, support HBR3, HDCP2.2/CEC/EDID/MST,
Gold-plated connectors.
1m/1.5m/2m

Backwards compatible with DisplayPort 1.4 and 1.2 cable.
The cable is VESA certified.



CG632
Display Port Cable 1.4V

Display port M/M 1.4V,
total bandwidth:32Gbps/8k@60Hz 4K@140Hz,
Support HBR3, HDCP2.2/CEC/EDID,
24K Gold plated Connector, OD:7.3mm, Black
1.5m/2m/3m



CG631
Display Port Cable 1.2V

Display port M/M 1.2V,
total bandwidth:21.6Gbps/4K@60Hz/1080P@60Hz,
24K Gold plated Connector, OD:7.3mm, Black
1.8m/3m

DVI CABLE

DVI (Digital Visual Interface) is a high-definition multimedia interface that provides high-bandwidth uncompressed digital audio and video transmission. Core technology based on the latest generation of TMS, come with the contents of thousands of megabits per second bandwidth, high-definition video and multichannel audio data combined into a single interface to support up to (1600X1200) UXGA resolution, the maximum transmission speed to 5Gbps, in order to realize the " high-definition Link ", mainly used in digital high-definition TV, plasma TV, LCD TV, rear projection TVs, projectors, DVD recording / playback machine, and digital video devices such as video and audio signal transmission .



CG442GD

DVI cable
DVI 24+1 M/M +2 Ferrite

Bare copper conductor, .24K Gold Plated Connector
Black, New model
1.5m/1.8m/3m/5m



CG441GD

DVI cable
DVI 24+1 M/M +2 Ferrite

24K Gold Plated Connector,
Digital transfers at rates up to 9.9 Gbps,
Support DVI devices, such as HDTV, DVD player, LCD TV,
Digital TV and other similar devices, Black
1.5m/1.8m/3m/5m



CG484G

HDMI to DVI cable
HDMI AM/DVI 24+1M

Bare copper conductor, .24K Gold Plated Connector
black, New model
1.6m/3m/5m



CG484GD

HDMI to DVI cable
HDMI AM/DVI 24+1M with 2Ferrite

Bare copper conductor, .24K Gold Plated Connector
black, New model
10m



CG481G

HDMI to DVI cable
HDMI AM/DVI 24+1M

24K Gold Plated Connector
black
1.5m/1.8m/3m/5m

VGA CABLE

DVI (Digital Visual Interface) is a high-definition multimedia interface that provides high-bandwidth uncompressed digital audio and video transmission. Core technology based on the latest generation of TMS, come with the contents of thousands of megabits per second bandwidth, high-definition video and multichannel audio data combined into a single interface to support up to (1600X1200) UXGA resolution, the maximum transmission speed to 5Gbps, in order to realize the " high-definition Link ", mainly used in digital high-definition TV, plasma TV, LCD TV, rear projection TVs, projectors, DVD recording / playback machine, and digital video devices such as video and audio signal transmission .



CG341AD

VGA cable
HD 15 M/M 3+4 +2Ferrite

Nickel Plated
Blue connector Black cable
1.5m/1.8m/3m/5m/10m/15m/20m/25m/30m/35m/40m/50m



CG342AD

VGA cable
HD 15 M/F 3+4 +2Ferrite

Nickel Plated
Blue connector Black cable
1.5m/1.8m/3m/5m/10m



CG021

VGA cable
HD 15M/2 × HD 15F

Beige cable, Nickel Plated
0.2m

Audio/Video Converter

CG605-L

1080P DP to HDMI

Display port M/HDMI AM ,
1080P@60Hz ,24K Gold plated Connector,white
1.8m



CG608

4K@30Hz DP to HDMI

Display port M/HDMI AM
4K@30Hz, Passive Chip on DP
24K Gold plated Connector, Black
1.8m



CG606

1080P DP to DVI

Display port M/DVI 24+1 M Cable,
1080P@60Hz,24K Gold plated Connector, black
1.8m



CG609

4K@60Hz DP to HDMI

Display port M/HDMI AM
4K@60Hz, Active Chip on HDMI
24K Gold plated
Connector, Black
1.8m



CG607

1080P DP to VGA

Display port M/VGA M Cable ,
1080P@60Hz,24K Gold plated Connector, black
1.8m



CG615

1080P Mini DP to HDMI

Mini Display port M/HDMI AM,
1080P@60Hz,24K Gold plated Connector, black
1.8m



CG591

1080P HDMI to VGA

HDMI AM/VGA F,1080P@60Hz,
HDMI connector: Gold plated ;
VGA:Nickel plated ,blue PBT,black
0.15m



CG491

1080P DVI to VGA

DVI(24+1)M to VGA F Converter
Connector 1: DVI (24+1) Male
Connector 2: VGA Female
Max Resolution:1080P@60HZ
Plug: Gold-plated
Shell material: ABS,black
0.15m



CG601

1080P DP to HDMI

Display Port Cable M/HDMI A F ,
Gold plated ,1080P@60Hz/2160P@24Hz White
0.15m



CG601

4K@30Hz DP TO HDMI

Display Port Cable M/HDMI A F ,
Gold plated ,4K@30Hz White
0.15m



CG602

1080P DP to DVI

Display Port Cable M/DVI(24+5)F ,
Gold plated ,1080P@60Hz/2160P@24Hz White
0.15m



CG603

1080P DP to VGA

Display Port Cable M/VGA F ,
Gold plated ,1080P@60Hz White
0.15m



CG611

1080P DP to HDMI

Mini Display port cable M/HDMI A F,
Nickel plated ,1080P@60Hz/2160P@24Hz,white
0.15m



CG612

1080P DP to DVI

Mini Display port cable M/DVI(24+5) F ,
Nickel plated ,1080P@60Hz/2160P@24Hz white
0.15m



CG613

1080P DP to VGA

Mini Display port cable M/VGA F,
Nickel plated ,1080P@60Hz white
0.15m



CG592

1080P HDMI to VGA

HDMI CM/VGA F,
HDMI connector: Gold plated ;
VGA:Nickel plated ,1080P@60Hz,white
0.15m





CG597

1080P VGA+USB+Audio to HDMI

VGA/M/HDMI F Converter
1080P@60Hz
HDMI / VGA connector: Nickel plated
3.5mm audio cable*1
MicroUSB charging cable*1



CG493A

1080P HDMI to VGA Male / USB / audio

VGA/M TO HDMI/M Cable with power and audio,
Gold plated
Material: PVC
Connector 1: VGA Male+USB+audio
Connector 2: HDMI type A male
Cable OD: 5.0mm
HDMI: 1080P@60Hz
1.8m



CG598A

1080P HDMI +USB to VGA + Audio

HDMI/M TO VGA/M Cable with power and audio,
Gold plated
Material: PVC
Connector 1: HDMI type A male+micro USB
Connector 2: VGA Male+Audio Male
Cable OD: 3.3x12.3mm
VGA : 1080P@60HZ
Audio Jack: TRS 3.5mm
1.8m



CG599A

4K HDMI +USB to DP

HDMI/M to DP Cable, Gold plated
Material: PVC
Connector 1: HDMI type A male+USB
Connector 2: DisplayPort Female
Cable OD: 5.0mm
DP: 3840X2160@60Hz
0.15m




CG599AC

4K HDMI +USB to DP

HDMI/M to DP Cable, Gold plated
Material: PVC
Connector 1: HDMI type A male+USB
Connector 2: DisplayPort Female
Cable OD: 5.0mm
DP: 3840X2160@60Hz
1.8m

Enjoy immersive videos

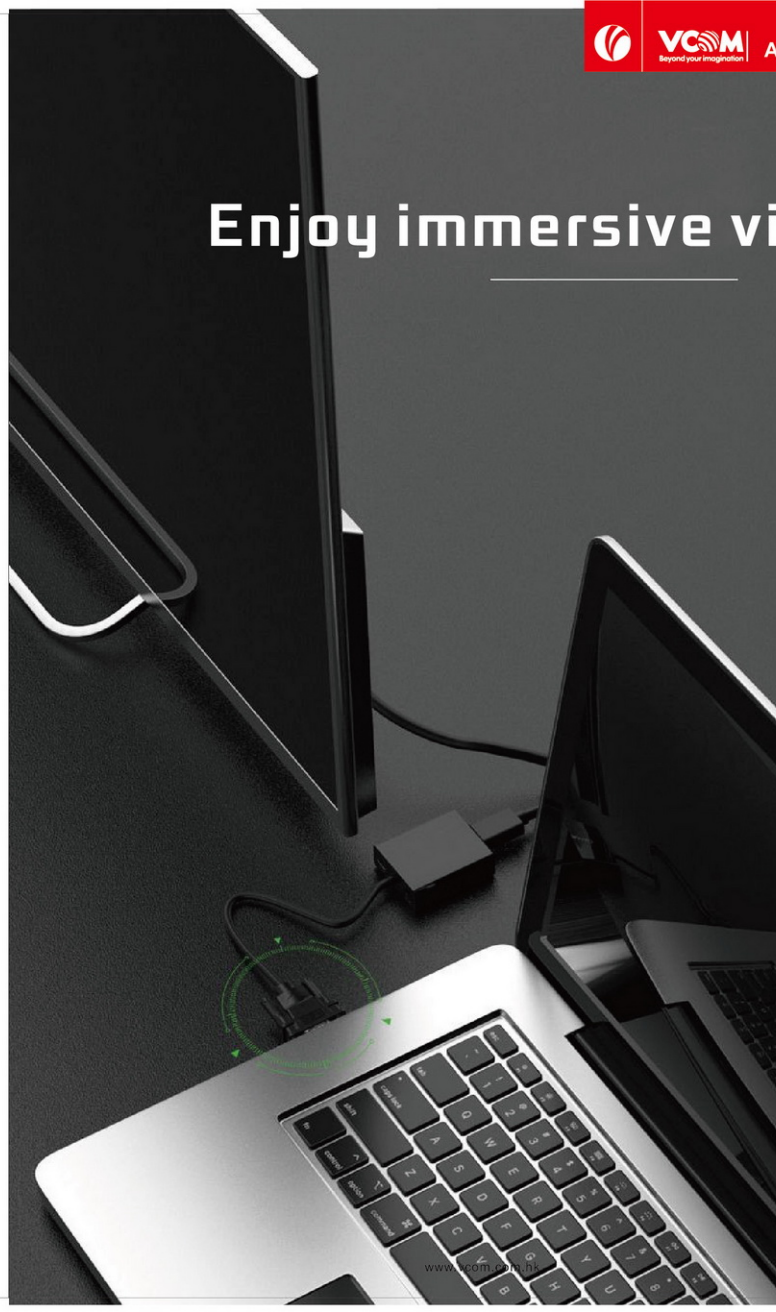

Toslink Cable

A Standard type of cable used to transmit analog audio and composite-video signals between devices such as televisions, satellite or cable receivers, VCRs, game console systems, speakers and more.

CV212
3.5ST M/ 2RCA M
Nickel Plated
1.5m/1.8m/3m/5m



CV204
3.5ST M/3.5ST M
Nickel Plated
Four-section plug
TRS with cTIA support (microphone)
1.5m/1.8m/3m/5m



CV022
2RCA M/ 2RCA M
Nickel Plated
1.5m/1.8m/3m/5m



CV201
3.5ST M/3.5ST M
Nickel Plated
1.5m/1.8m/3m/5m



CV033
3RCA M/ 3RCA M
Nickel Plated
1.5m/1.8m/3m/5m



CV202
3.5ST M/3.5ST F
Nickel Plated
1.5/1.8m/3m/5m



CV203
3.5ST M/2*3.5ST F
Nickel Plated
0.2m



CV905
VCOM Toslink Cable
1.8m



ADAPTER

VCOM have different adaptors such as audio adapter, video adapter and data cable terminal. The high quality metal terminal and plastic material can reduce the loss of signal and keep the stability of performance and extended service life.



CA301
DVI 24+5M /HD 15F Adapter
Nickel Plated , grey



CA312
HDMI 19F/DVI 24+1M Adapter
Gold plated,black



CA311
HDMI 19M/DVI 24+1F Adapter
Gold plated,black



CA511
3.5ST M/ 2*3.5 STF Adapter
Nickel Plated , black



CA316
MINI HDMI M/HDMI AF Adapter
Gold plated,black



CA325
HDMI 19 F/Micro HDMI 19M Adapter
Gold plated,black



CA313
HDMI AF/AF Adapter
Gold plated,black



CA082
HD15 F/F Mini Type Adapter
Nickel Plated



CA331
DP M to HDMI F Adapter
1080P@60Hz,Gold plated



CA332

DP M to DVI (24+5) F Adaptor
1080P@60Hz, Gold plated
black



CA333

DP M to VGA F Adaptor
1080P@60Hz, Gold plated
black



CA334

Mini DP M to HDMI F Adaptor
Gold plated, black



CA335

Mini DP M to VGA F Adaptor
Gold plated, black



CA431M

USB 3.0 C/M to A/F Adaptor
Connector 1: USB 3.1 type C Male
Connector 2: USB 3.0 Type A Female
Data transfer: USB 3.1 up to 5Gbps data transfer rate
Plug: Nickel-plated
Material: Aluminum alloy shell



CA436M

**USB 3.0 Type C Female to
USB A Male Adaptor**

Without chip. Support Data Sync and Charging,
and it will NOT support video signal
transmission. Aluminum shell



CA309

HDMI AM to AF Adaptor
Lateral bend 90 Angle
Gold plated, black



CA310

HDMI AM to AF Adaptor
Lateral bend 270 Angle
Gold plated, black



CA329

HDMI AM to AF Adaptor
Lateral bend 90 Angle
Gold plated, black



CA319

HDMI AM to AF Adaptor
Lateral bend 270 Angle
Gold plated, black



CA336A

1080P HDMI to VGA+Audio

HDMI/AF to VGA/M+Audio Adaptor, Gold plated
Material: ABS
Input: HDMI type A Female
Output: VGA Male+Audio
VGA: 1080P@60Hz
Audio Jack: TRS 3.5mm



CA337A

1080P VGA+USB+Audio to HDMI

VGA/M to HDMI/AF Cable with power and audio,
Gold plated
Input: VGA Male+USB+Audio(TRS 3.5mm)
Output: HDMI type A Female
HDMI: 1080P@60Hz

USB CABLE

USB (Universal Serial Bus) is a specification to establish communication between devices and a host controller (usually personal computers). USB is short for Universal Serial BUS. USB has the advantages of high transmission speed (the speed of USB 1.1 is 12 Mbps, USB 2.0 is 480Mbps, USB 3.0 is 5 Gbps), easy to use, hot-swapping support, flexible connection independent power supply. It can be used to connect with the mouse, keyboard, printer, scanner, camera, flash disk, MP3, mobile phone, digital camera, mobile HDD, external floppy drive, USB network card, ADSL Modem, Cable Modem and so on, almost all the external equipments.

CU201-TL

USB 2.0 Printer Cable
USB AM/BM 2.0V, Transparent Blue
1.5m/1.8m/3m/5m



CU201-B

USB 2.0 Printer Cable
USB AM/BM 2.0V, Black
1.5m/1.8m/3m/5m



CU202-TL

USB 2.0 Extension Cable
USB AM/AF 2.0V, Transparent Blue
1.5m/1.8m/3m/5m



CU202-B

USB 2.0 Extension Cable
USB AM/AF 2.0V, Black
1.5m/1.8m/3m/5m



CU823A

USB 2.0 Extension Cable
USB Extension W/IC,
Transparent cable with black hood
5m/10m/15m/20m/25m/30m



CU271V

USB 2.0 Charging & Data Cable
USB AM/Micro USB 2.0V (with VCOM logo),
black
1m/1.5m/1.8m/3m



CU302

USB 3.0 Extension Cable
USB AM/AF 3.0V, Blue
1.8m/3m/5m



CU311

USB 3.0 Data Cable
USB AM/Micro USB BM 3.0V, Blue
1.8m/3m/5m



CU827A

USB 3.0 Active Extension Cable with Signal Booster

Black, OD: 5.5mm
5m/10m/15m



CU806

USB to Printer
USB to Printer with IC, black
1.2m



CU807

USB 2.0 to PS/2
USB 2.0 to PS/2, grey
0.2m



DU312M

USB 3.0 to Ethernet RJ45 LAN Gigabit Adapter

for 10/100/1000 Mbps Compatible with Mac OS X, Linux, Chrome OS, Windows 10/8.1/8/7/XP/Vista
0.2m




CU320-B

USB3.0 to HDMI/F Adapter
Connector 1: USB 3.0 A Male
Connector 2: HDMI Type A Female
HDMI : Max 1920*1080@60Hz



CU804

USB to Serial
USB to Serial cable with IC (single chip),
RS232, with CD, Transparent cable
1.2m



CU824

VCOM USB_AMAF
VCOM USB_AMAF/RJ45_extensible 45M
black



CU834

USB 2.0 AM to Ethernet RJ-45
USB 2.0 AM to Ethernet RJ-45 Jack,
White, 10/100 Mbps
0.15m



CU322M

USB3.0 to HDMI/F + VGA/F Adapter

Support Max Resolution 1080p@60Hz,
compatible with Windows 10/8.1/8/7, 0.15m



CU321-B

USB3.0 to VGA Adapter

USB to VGA Adapter Aluminum shell
Support xp, win7, win8, win10, macos
Support USB2.0, USB3.0, both can support 1920x1080P
Support HDCP2.2
Support EDID



PC INTERNAL DATA CABLE

These wires are used to connect the internal PC's CPU motherboard, CD-ROM, hard disk. The OFC conductor and the high quality PVC insulation can reduce the loss of signal and keep the stability of performance.

CH301
Serial ATA Cable
0.45m



CH302R
Serial ATA Cable
W/Lock Right Angle
0.45m



CH321
SATA+Power Cable
0.45M+0.45M




CH352
SATA Power
Cord Y Type
0.2m+0.2m



CH351
SATA Power
Cord
0.15m



CH302
Power Supplier Cable
Y Type
(5.25M/2*5.25F), 0.15m



POWER CABLE

CE001
Power Cord Monitor
H03VV-F
1.5m/1.8m/3m/5m



CE021
Power Cord Monitor
H03VV-F
1.5m/1.8m/3m/5m



CE022
Power Cord EU Type
For Notebook
1.5m/1.8m/3m/5m



CE031
Power Cord US Type
SVT 18AWG,OD:6.5mm
1.5m/1.8m/3m/5m



CE032
Power Cord US Type
SVT 18AWG,OD:6.5mm
1.5m/1.8m/3m/5m



CE033
Power Cord US Type
SPT-1,18AWG*2C,OD:2.7*5.4mm
1.5m/1.8m/3m/5m



CE023
Power Cord EU Type
H03VVH2-F
1.5m/1.8m/3m/5m



CE041
Power Cord UK Type
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE042
Power Cord For Notebook
UK Type
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE073
Power Cord
South Africa Big
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE074
Power Cord For Notebook
South Africa Small
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE071
Power Cord
South Africa Big
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE072
Power Cord For Notebook
Southafrica Big
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE061
Power Cord AU
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



CE062
Power Cord For
Notebook AU Type
H03VV-F 3G0.50MM²&3G0.75MM²
1.5m/1.8m/3m/5m



NETWORK CABLE

Networking cables are used to connect one network device to other network devices or to connect two or more computers to share printer, scanner etc. Different types of network cables like Coaxial cable, Optical fiber cable, Twisted Pair cables are used depending on the network's topology, protocol and size. The devices can be separated by a few meters (e.g. via Ethernet) or nearly unlimited distances (e.g. via the interconnections of the Internet).


NC514 CAT5e UTP 4pair 24AWG BC&CCA

Product standards : TIA/EIA568B : ISO/IEC 11801
Frequency:100 MHz
Colour : Grey (Blue, Green, Red, Yellow, Black)
Outer diameter : 5.20±0.20mm
Packaging:305M/R,2R/Cartron;100M/R,4R/Cartron.




NC524 CAT5e FTP 4pair 24AWG BC&CCA

Product standards : TIA/EIA 568B : ISO/IEC 11801
Frequency:100 MHz
Colour : Grey
Outer diameter : 5.60±0.20mm
Packaging:305M/R,2R/Cartron;100M/R,4R/Cartron.



NC534 SFTP Cat5e 305m 4Pair, 0.50CCA 96Braid

Product standards : TIA/EIA568B : ISO/IEC 11801
Frequency:100 MHz
Colour : Grey
Outer diameter : 6.00±0.20mm
Packaging:305M/R,2R/Cartron;100M/R,4R/Cartron.



NC614 CAT6 UTP 4pair 23AWG BC&CCA

Product standards : TIA/EIA 568B.2-1 : ISO/IEC 11801
Frequency:250 MHz
Colour : Grey (Blue, Green, Red, Yellow,Black can customize according to the requirements)
Outer diameter : 6.00±0.20mm
Packaging:305M/R,2R/Cartron;100M/R,4R/Cartron.



NC624 CAT6 FTP 4pair 23AWG BC&CCA

Product standards : TIA/EIA 568B.2-1 : ISO/IEC 11801
Frequency:250 MHz
Colour : Grey
Outer diameter : 6.20±0.20mm
Packaging:305M/R,2R/Cartron;



NC634 CAT6 SFTP 4pair 23AWG BC&CCA

Product standards : TIA/EIA 568B.2-1 : ISO/IEC 11801
Frequency:250 MHz
Colour : Grey
Outer diameter : 6.50±0.20mm
Packaging:305M/R,2R/Cartron;



NC544 CAT5e UTP Outdoor 4pair 24AWG BC

Product standards : TIA/EIA 568B : ISO/IEC 11801
Frequency: 100 MHz
Colour : Black
Outer diameter : 6.00±0.20mm
Packaging:305M/R,2R/Cartron;



PATCH CORD

The transmission frequency of Cat5e is 100MHz;the transmission frequency of Cat6 is 250MHz.

Application range

Fit for 10/1000 BASE-TX Ethernet data transmission rate 10/1000 Mbps, it is kilo mega cyber, interconnection of kilo mega cyber equipment, such as connection kilo mega switchboards, PC with kilo mega network card between kilo mega switchboard, PC between PC, PC between ADSL, PC between HUB, PC between Fibercom, and also between laptop network cards.

Attention

The connection of crossover patch cable is 568A-568B, which is different from standard connection. It is usually suitable to the same equipment connection, such as PC-PC

NP512B

UTP Cat5e Patch Cord Stranded(7/0.16)

CCA with button, Grey, OD:5.2±0.2mm
MOQ: 15000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP522

FTP Cat5e Patch Cord Stranded(7/0.16)

CCA OD:5.4±0.2mm Grey MOQ: 5000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP532

SFTP Cat5e Patch Cord Stranded (7/0.16)

CCA OD:5.6±0.2mm, Grey
MOQ: 5000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP612B

UTP Cat6 Patch Cord Stranded(7/0.20)

CCA, Grey, OD:6.0±0.2mm W/Button
MOQ: 15000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP622B

FTP Cat6 Patch Cord Stranded(7/0.20)

CCA+DW+AL, Grey, OD:6.2±0.2mm W/Button
MOQ: 5000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP632B

UTP Cat6 Patch Cord Stranded(7/0.20)

CCA, Grey, OD:6.0±0.2mm W/Button
MOQ: 15000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/
20m/25m/30m



NP512B

UTP Cat5e Patch Cord Stranded(7/0.16BC)*4P +PVC

Jacket OD:5.2±0.2mm with button,Grey, MOQ: 10000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/20m/25m/30m



NP511B

UTP Cat5e Patch Cord

0.50CCA with button MOQ: 5000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/20m/25m/30m



NP531

SFTP Cat5e Patch Cord 24AWG,Grey

0.5m/1m/1.5m/2m/3m/5m/10m/15m/20m/25m/30m



NP621

FTP Cat 6 Patch Cord

0.57CCA Grey MOQ:5000 M
0.5m/1m/1.5m/2m/3m/5m/10m/15m/20m/25m/30m



NP612B

UTP Cat6 Patch Cord (7/0.20BC)*4P+Cross PE +PVC jacket ,

Grey, W/Button MOQ: 10000 M
0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/20m/25m/30m



NP521

FTP Cat5e Patch Cord


0.50CCA with button, MOQ: 5000 M
0.5m/1m/1.5m/2m/3m/5m/10m/15m/20m/25m/30m



NP611B

UTP Cat6 Patch Cord with button 23AWG , Grey

0.5m/1m/1.5m/2m/3m/5m/7m/10m/15m/20m/25m/30m

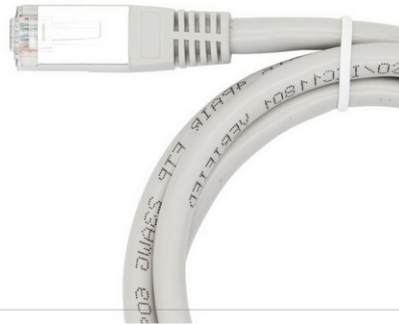

Starlink High-Speed Interconnect Cable ▶▶▶

NP641

Starlink Gen2 High-Speed Interconnect Cable

Cable Category CAT5E
Cable Shielding FTP
Connector Type Starlink SPX
Connector Material Nickel-plated
Compatible Devices Starlink Gen2
Transmission Speed 1000Mbps
Jacket Material PVC
Wire Gauge 26 AWG
Outer Diameter (OD) 6.0mm
2m/10m/15m/23m/30m/46m/50m



NP642

Starlink Gen3 High-Speed Interconnect Cable

Cable Category CAT5E
Cable Shielding FTP
Connector Type RJ45
Compatible Devices Starlink Gen3
Transmission Speed 1200Mbps
Jacket Material PVC
Wire Gauge 26 AWG
Outer Diameter (OD) 6.0mm
2m/10m/15m/23m/30m/46m/50m



2000Mbps



26 AWG



Cat5e



Various Lengths

NETWORK ACCESSORIES & TOOLS



NM001
RJ45 Color Boot White /Green/Red/Blue/Yellow
20PCS/BAG



NM005
RJ45 8P8C CAT5E/UTP /RJ45 20PCS/BAG



NM025
RJ45 8P8C PLUG CAT5E/STP /RJ45/FU 20PCS/BAG



NM006
RJ45 8P8C PLUG CAT6/UTP /RJ45/3U 20PCS/BAG



NM026
RJ45 8P8C PLUG Cat 6/STP/RJ45/3u (one part)



D1654
RJ45 Cat6A Shielded Plug with Liner, 15µ, 3 forks, 2 parts 80PCS/BOX



NM205
CAT5e UTP Keystone Jack



NM206
CAT6 UTP Keystone Jack



NM241
RJ45 Keystone Mount Box 1Port



NM242
RJ45 Keystone Mount Box 2Port



CT251
8P8C Coupler



CT253
8P8C Plug/ 2*8P8C 2Jack



CT251S
RJ45 Coupler, with PCB, Shielded, PVC injection molding, Black



CT252S
RJ45 Coupler 8P8C Jack/2*8P8C 2Jack, with PCB, Shielded, PVC injection molding, Black



NT101
Cable Tester



D1930
Cable Tester for network & telephone cable



Nt088
CAT7 crimp tools, for Cat7 Cat6 Cat5e Cat5 STP Plugs with liner



NT084
Crimping Tool RJ45+RJ11+RJ12



D1902
Network Crimp Tool, 8P+6P, Red



D1903
Network Crimp Tool, 8P+6P+4P, Black/Blue



D1920
Cable Stripper for Wire



D1922
Diagonal Cutting Pliers (PANTONE: 1495C)



D1911
Punch Tool single pair-wire Orange



D1931
Wire tracker for network & telephone cable

Cabinet

D1206	6U 600x450mm
D1209	9U 600x450mm
D1212	12U 600x450mm



19inch single section wall mount cabinet

Tempered glass front door with JC01 lock
Removable side panels without lock
1PC fan on top with french plug
1PC fixed shelf
25sets cage nuts
Flat package
Black color

D1206	6U 600x600mm
D1209	9U 600x600mm
D1212	12U 600x600mm



19inch double section wall mount cabinet

Tempered glass front door with JC01 lock
Removable side panels with JC01 lock
2PCS fans on top with french plug
1PC fixed shelf
25sets cage nuts
Flat package
Black color

D1222	22U 600x600mm
D1227	27U 600x600mm
D1232	32U 600x800mm
D1237	37U 600x800mm
D1242	42U 800x800mm
D1247	47U 800x800mm



19inch standing network cabinet

Tempered glass front door with JC04 lock
Steel back door with JC01 lock
Removable side panels with JC01 lock
2PCS fans on top for 600mm depth cabinet
4PCS fans on top for 800-1000mm depth cabinet
2PCS fixed shelves
2 castors and 2 braked castors
4 adjustable feet
Flat package
Black color



D1252

6-Outlet UK PDU , 1U
with thermal protector,
16A 250V



USB4

The USB-C that does it all




CU580M

USB-C 80Gbps USB4 Cable

Material: Aluminum shell+Nickel Plated plug
Data transfer: 80Gbps USB4,
Power: Built in E-Marker Chip support 240W/
100W.

Video: Dual screens at 4K@60Hz/5K@60Hz,
Single screen at 8K@60Hz.
Compatible with Thunderbolt 4/3,
USB3.2 & 3.1 Transfer protocol
Function: Charge, Data Transfer, Video, Audio

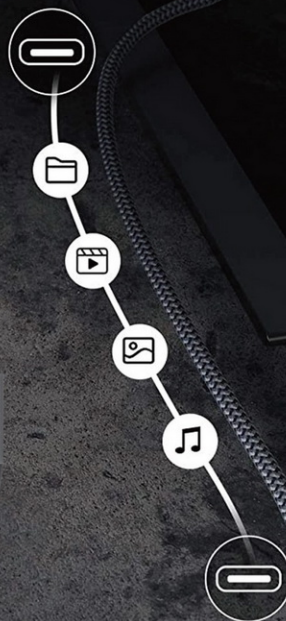

USB4 Cable



CU540M

USB C/M to C/M Cable with IC 40Gbps

Material: Aluminum shell+Braid+Nickel plated plug
Data transfer: 40Gbps USB4
Current Rating: 5A
Power: Built in E-Marker Chip support 100W
USB Power Delivery :Support
Video: Single 8K@30Hz/5K@60Hz or Dual 4K@60Hz
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 4/3,USB3.2 & 3.1 Transfer protocol
1.2m



CU520M

USB C/M to C/M Cable with IC 20Gbps

Material: Aluminum shell+Braid+Nickel plated plug
Length:2m
Data transfer: 20Gbps USB4
Current Rating: 5A
Power: Built in E-Marker Chip support 100W
USB Power Delivery :Support
Video: Single 8K@30Hz/5K@60Hz or Dual 4K@60Hz
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 4/3,USB3.2 & 3.1 Transfer protocol
2m



CU541M

USB C/M to C/M Cable with IC 40Gbps 240W USB 4 Aluminum shell

Material: Aluminum shell+Braid+Gold plated plug
Data transfer: 40Gbps USB 4
Current Rating: 5A
Power: Built in E-Marker Chip support 240W
USB Power Delivery :Support
Video: support 5K@60Hz resolution
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 3,USB3.2 & 3.1 Transfer protocol
0.8m/1m/1.2m



CU521M

USB C/M to C/M Cable with IC 20Gbps 240W USB 4 Aluminum shell

Material: Aluminum shell+Braid+Gold plated plug
Data transfer: 20Gbps USB 4
Current Rating: 5A
Power: Built in E-Marker Chip support 240W
USB Power Delivery :Support
Video: support 5K@60Hz resolution
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 3,USB3.2 & 3.1 Transfer protocol
2m



CU543MR

USB-C 40Gbps USB4 Right Angle Cable

Coaxial line, Aluminum shell 1.2m
Data transfer: 40Gbps USB4
Current Rating: 5A
Power: Built in E-Marker Chip support 240W
USB Power Delivery :Support
Video: Single 8K@30Hz 5K@60Hz or Dual 4K@60Hz
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol
0.8m/1m/1.2m



CU544

USB-C 40Gbps USB4 FPC Flat Cable

Soft and easy to bend
Data transfer: 40Gbps USB4
Current Rating: 5A
Power: Built in E-Marker Chip support 240W
USB Power Delivery :Support
Video: Single 8K@30Hz 5K@60Hz or Dual 4K@60Hz
Function: Charge, Data Transfer, Video, Audio
Compatible with Thunderbolt 4/3, USB3.2 & 3.1 Transfer protocol
0.13m

USB4 Type C Adaptor



CA444A

USB4 Type C Adaptor

40Gbps Data Transfer
Max 100W Fast Charging
8K Video Output



CA444B

USB4 Type C Adaptor

40Gbps Data Transfer
Max 100W Fast Charging
8K Video Output



CA444C

USB4 Type C Adaptor

40Gbps Data Transfer
Max 100W Fast Charging
8K Video Output




CA444D

USB4 Type C Adaptor

40Gbps Data Transfer
Max 100W Fast Charging
8K Video Output

USB4 Type C Adaptor

The USB C adaptor allows the cable to have a suitable extension direction, which can avoid the wear of the cable and the input port of the device, prolong the service life, and support charging and data transmission.

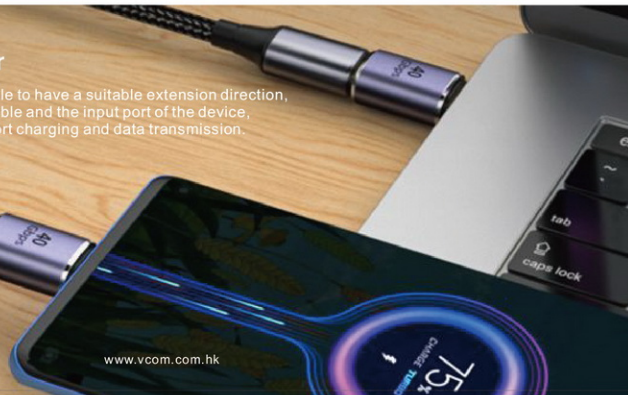

USB-C Data Cable



CU406M	USB C/M to C/M Cable 480Mbps USB 2.0 3A current PD60W Material: Aluminum shell+Cotton black+grey,1m
CU407M	USB C/M to C/M Cable 480Mbps USB 2.0 5A current PD100W Material: Aluminum shell+Cotton black+grey,1m
CU410M	USB C/M to C/M Cable 10Gbps USB 3.2 Gen2 3A current PD60W Material: Aluminum shell+Cotton black+grey,1m
CU420M	USB C/M to C/M Cable 20Gbps USB 3.2 Gen2*2 5A current PD100W Material: Aluminum shell+Cotton black+grey,1m



CU405M

USB A/M to C/M Cable

480Mbps USB 2.0 3A Aluminum she
black+grey,1m/1.8m



CU401M

USB A/M to C/M Cable

10Gbps transmission USB 3.2 Gen2
3A Aluminum shell
black+grey,1m/1.8m



CU402M

USB C/M to USB 3.0 Micro-BM Cable

5Gbps USB 3.2 Gen 1 Aluminum Shell
Gold plated ,
0.5m/1m



CU403M

USB C/M to USB 3.0 BM Cable

5Gbps USB 3.2 Gen 1 Aluminum Shell
Gold plated, 1.8m



CU409

USB C/M to A/F Cable

5Gbps USB 3.2 Gen 1
Black.Length:22cm



CU419-3.0

**Magnetic Retractable Cable
USB3.2 Gen 2**

Connector Type USB Type C
USB Version USB3.2 Gen 2
Data Transfer Speed SuperSpeed+ (10 Gbps)
Cable Type USB-C to USB-C cable
Connector Material Nickel-plated
Shielding Double shielded
Compatibility USB 1.1, USB 2.0, USB 3.2, USB Power Delivery (USB PD)
Charging Standards PD100W
1m/1.5m/1.8m



CU419-2.0

**Magnetic Retractable Cable
USB2.0**

Connector Type USB Type C
USB Version USB2.0
Data Transfer Speed High-Speed (480 Mbps)
Cable Type USB-C to USB-C cable
Connector Material Nickel-plated
Shielding Double shielded
Compatibility USB 1.1, USB 2.0, USB Power Delivery (USB PD)
Charging Standards PD100W



CU289

**Type-C to Lightning 18W
white, 1m**

CU291

**Fast USB Type C Charger
Cable 3A
white, 1m**



CU287C

**TYPE-C Fast Charge Cable
3A, 1m
Black Cable & Silver Shell**



CU287M

**Android Quick Charge Cable
2.4A, 1m
Black Cable & Silver Shell**



CU287L

**iPhone Quick Charge Cable
2.4A, 1m
Black Cable & Silver Shell**



USB Type C Dongle



CU423MC

USB Type C to HDMI A/M

Connector 1: USB type C Male
Connector 2: HDMI type A Male
HDMI : Max 4K UHD 3840*2160@60Hz
Length:1.8m



CU422MC

USB Type C to DP Cable

Connector 1: USB type C Male
Connector 2: Displayport Male
DP : Max 4K UHD 3840*2160@60Hz
Length:1.8m



CU425MC

USB 3.1 C/M to Mini DP

Connector 1: USB 3.1 type C Male
Connector 2: Mini Displayport Male
Mini DP: Max 4K UHD 3840*2160@60Hz



CU423MCPD

USB Type C to HDMI A/M

Connector 1: USB type C Male
Connector 2: HDMI type A Male
HDMI : Max 4K UHD 3840*2160@60Hz
USB-C(charge) : PD3.0 60W
Length:1.8m



DU320M

USB Type C to RJ45

Connector 1: USB Type C Male
Connector 2: RJ45 connector
Data transfer: 1000 Mbps network
Dark Grey,0.2m



CU423T

USB Type C to HDMI A/F

Connector 1: USB type C Male
Connector 2: HDMI type A Female
HDMI : Max 4K UHD 3840*2160@60Hz
Space Gray, 0.15m



CU421T

USB Type C to VGA

Connector 1: USB type C Male
Connector 2: VGA Female
VGA: 1080P@60Hz
Space Gray, 0.15m



CU422MB

USB Type C to DP

Connector 1: USB type C Male
Connector 2: Displayport Female
DP: Max 4K UHD 3840*2160@60Hz
Space Gray, 0.15m



CU452A
USB Type C to HDMI A/F Dongle with PD
Max 4K UHD 3840*2160@60Hz,
Aluminum Shell



CU453A
USB Type C to DP Dongle with PD
Max 4K UHD 3840*2160@60Hz,
Aluminum Shell



CU480M
USB Type C to DP/F
8K@60Hz, Gold plated
Mini Aluminum Shell
Gray, 0.25m



CU480MC
USB Type C to DP/M Cable
8K@60Hz, Gold plated
Aluminum Shell
Gray, 1.8m/3m



CUE604s
USB Type C to 2.5 Gigabit Ethernet Adapter
Aluminum USB-C to RJ45 (2.5Gbps) Adapter
Stable internet speeds of 2500Mbps,
2.5 times faster than traditional products
Dark Grey, 0.25m



CU490
USB Type C to DP/M 16K@30Hz
Connector 1: USB C Male
Connector 2: Display port 2.1V Male
Bandwidth up to 40Gbps
Resolution: Max 16K@30Hz, 8K@60Hz,
4k@240/144/120/60/30Hz/2K@240/144/120/60Hz, 1080P@360/240/120/60Hz
Aluminum Shell
Gold plated, black nylon braid



DU325MA
USB Type A to 2.5 Gigabit Ethernet Adapter



DU325MC
USB Type C to 2.5 Gigabit Ethernet Adapter



DU320MAC
USB A+Type C to Gigabit Ethernet Converter
Side 1: USB-A+USB-C Adapter
Side 2: RJ45 connector
Data transfer: 1000 Mbps network
Shell material: Aluminum shell
Dark Grey, 0.15m



DU325MAC
USB A+Type C to 2.5 Gigabit Ethernet Converter
Side 1: USB-A+USB-C Adapter
Side 2: RJ45 connector
Data transfer: 2500 Mbps network
Shell material: Aluminum shell
Dark Grey, 0.15m



USB TYPE-C DOCKING

CUE14



3 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 1 x USB-A 3.0 (5Gbps)
- 1 x PD 3.0 100W



CUE15



3 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x USB-A 3.0 (5Gbps)
- 1 x PD 3.0 100W



CUE18



7 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 1 x USB-A 3.0 (5Gbps)
- 2 x USB-A 2.0 (480Mbps)
- 1 x SD 2.0
- 1 x TF 2.0
- 1 x PD 3.0 100W



CUE35



6 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 4 x USB-A 3.0 (5Gbps)
- 1 x PD 3.0 100W



CUE36



6 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 4 x USB-C 3.2 Gen1 (5Gbps)
- 1 x PD 3.0 100W



CUE38



6 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x USB-C Gen1 (5Gbps)
- 3 x USB-A 3.0 (5Gbps)
- 1 x PD 3.0 100W



CUE55



6 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 1 x Gigabit LAN
- 3 x USB-A 3.0 (5Gbps)
- 1 x PD 3.0 100W



CUE39



7 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x HDMI (1080P@60Hz)
- 2 x USB-A 3.0 (5Gbps)
- 1 x SD 2.0
- 1 x TF 2.0
- 1 x PD 3.0 100W



Windows MST (Extended or Mirror)
MacOS DXP (Extended or Mirror)

CUE56



7 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x Gigabit LAN
- 2 x USB-A 3.0 (5Gbps)
- 1 x SD 3.0
- 1 x TF 3.0
- 1 x PD 3.0 100W



CU4592



5 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 2 x USB A 3.0 (5Gbps)
- 1 x Gigabit LAN
- 1 x PD 3.0 100W

CU454A



3 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 1 x USB A 3.0 (5Gb)
- 1 x PD 3.0 100W

CU450S



4 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x HDMI (4K@30Hz)
- 1 x USB-A 2.0
- 1 x PD 3.0 100W

CU4511



5 in 1 USB -C Hub

- 1 x HDMI (4K@30Hz)
- 1 x VGA (1080P@60Hz)
- 1 x 3.5mm
- 1 x USB A 3.0 (5Gbps)
- 1 x PD 3.0 100W

CU4512



4 in 1 USB -C Hub

- 1 x HDMI (4K@60Hz)
- 1 x VGA (1080P@60Hz)
- 1 x USB-A 2.0
- 1 x PD 3.0 100W

Support MST



CU4801
4 in 1 USB -C Hub
1 x HDMI (8K@30Hz)
1 x HDMI (4K@60Hz)
1 x USB-A 2.0
1 x PD 3.0 100W
Support MST/SST function



CU4802
4 in 1 USB -C Hub
1 x HDMI (8K@30Hz)
1 x DP (4K@60Hz)
1 x USB-A 2.0
1 x PD 3.0 100W
Support MST/SST function



CG642M
2 in 1 Hub
1 x HDMI (8K@30Hz)
1 x HDMI (4K@60Hz)
Support MST/SST function



CU4803
4 in 1 USB -C Hub
1 x DP(8K@60Hz)
1 x DP (4K@60Hz)
1 x USB-A 2.0
1 x PD 3.0 100W
Support MST/SST function



CUE67
10 in 1 USB -C Hub
1 x HDMI (8K@30Hz Max)
1 x Gigabit LAN
1 x USB 3.1 (10Gbps)
1 x SD 3.0
1 x PD 3.0 100W
Windows MST Extended or Mirror



CUE68
10 in 1 USB -C Hub
2 x HDMI (4K@60Hz Max)
1 x USB A 3.0 (5Gbps)
2 x USB-C 3.1(10Gbps)
1 x TF 3.0
1 x Gigabit LAN
1 x USB 3.1 (10Gbps)
1 x SD 3.0
1 x PD 3.0 100W
Windows MST Extended or Mirror



CUE64
8 in 1 Game Hub
1 x HDMI (8K@30Hz Max)
1 x Gigabit LAN
1 x SD 3.0
1 x DC 3.5mm
1 x DP (4K@144Hz Max)
1 x USB A 3.0 (5Gbps)
1 x TF 3.0
1 x PD 3.0 100W
Windows support MST, SST.
Mac OS support SST.



CUE65
8 in 1 USB -C Hub
1 x HDMI (4K@60Hz)
1 x Gigabit LAN
1 x USB-C (5Gbps)
1 x PD 3.0 100W
1 x HDMI (4K@30Hz)
1 x USB A 3.0 (5Gbps)
1 x USB-A 2.0
Support windows/MAC OS
Single display/Dual display: 4K@60Hz & 4K@30Hz

CU4706



13 in 1 USB -C Hub
2 x HDMI (4K@60Hz)
3 x USB A 3.0 (5Gbps)
1 x USB2.0 480Mbps
1 x SD 3.0
1 x PD 3.0 100W, 15Watt reserved
1 x L-Shape Type C Connector
1 x DP(4K@60Hz)
1 x USB-C 2.0(480Mbps)
1 x Gigabit LAN
1 x TF 3.0
1 x DC 3.5mm



CUE75



11 in 1 USB -C Hub
2 x HDMI (4K@60Hz)
3x USB A 3.0 (5Gbps)
1 x Audio
1 x TF 3.0
1 x Gigabit LAN
1 x USB-C (5Gbps)
1 x SD 3.0
1 x PD 3.0 100W
Windows support MST,SST.
Mac OS support SST



CU4703



15 in 1 USB -C Hub
3 x USB A 3.0 (5Gbps)
1 x VGA (1080P@60Hz)
1 x SD 3.0
1 x DC 3.5mm
1 x DP(4K@30Hz)
1 x USB-C(charge): PD 60W,15Watt reserved
2 x USB2.0 480Mbps
1 x Gigabit LAN
1 x TF 3.0
1 x HDMI (4K@30Hz)
2 x USB-C(data): 5Gbps
MST & SST Configuration, support 3 different screen output



USB-C /USB-A HUB



DH311B

USB HUB with RJ45

Side 1: USB Type C Male
Side 2: USB 3.0*3+RJ45
Material: Aluminum shell+Nickel plated plug
USB: Up to 5Gbps, USB ports for data syncing
RJ45: Up to 1000Mbps network



DH312B

USB HUB with RJ45

Side 1: USB 3.0 AM
Side 2: USB3.0*3+RJ45
USB: Up to 5Gbps, USB ports for data syncing
RJ45: Up to 1000Mbps network
Shell material: Aluminum shell



CUE11

5 in 1 USB-C Hub

4 x USB-C 3.1 (5Gbps)
1 x USB-C (5V in)
★ USB 3.1*4: Up to 5Gbps, only for data syncing, not support video output or charging
★ USB C 5V in: Provides power to the four USB-C ports, only for a stable data transfer connection, no support charging laptops, video output, or data transfer.



CUE11s

5 in 1 USB-C Hub

4 x USB-C 3.1 (10Gbps)
1 x PD 3.0 100W
★ USB 3.1*4: Up to 10Gbps, only for data syncing, not support video output or charging
★ PD 3.0 (20V5A, 100W for Charge)



DH307C

USB Type C to USB3.0*4 HUB

4 in 1, plastic shell
Side 1: USB Type C Male
Side 2: USB 3.0*4+micro USB power supply
Material: Plastic shell+Nickel plated plug
USB: Up to 5Gbps, USB ports for data syncing
Compatible with USB 2.0 / 1.1 / 1.0
Compatibility: Windows 2000/XP/Vista/7/8/10 & MAC OS X & Linux



DH207

USB 2.0 to USB2.0*4 HUB

4 in 1, plastic shell
Side 1: USB2.0 A Male
Side 2: USB 2.0*4+micro USB power supply
Material: Plastic shell+Nickel plated plug
Data transfer: USB 2.0 480Mbps
Compatible with USB 2.0 / 1.1 / 1.0



DH307

USB 3.0 to USB3.0*4 HUB

4 in 1, plastic shell
Side 1: USB 3.0 A Male
Side 2: USB 3.0*4+micro USB power supply
Material: Plastic shell+Nickel plated plug
Data transfer: USB 3.0 5Gbps
Compatible with USB 2.0 / 1.1 / 1.0
Compatibility: Windows 2000/XP/Vista/7/8/10 & MAC OS X & Linux



USB 3.0 HUB



DH333

5 ports USB 3.0 HUB

Material: Aluminum shell
Data transfer: USB 3.0 5Gbps
1-4 ports: Support data transfer
5 port: Only charging maximum power 12W, does not support data transfer
Individual On/Off Switches.
Cable length: 1m
Certified Power adapter: DC 5V 3A,
Size: 100*50.5*24mm

DH335

10 ports USB 3.0 HUB

Material: Aluminum shell
Data transfer: USB 3.0 5Gbps
1-6 ports: support data transfer
7-10 port: Support data transfer and fast Individual On/Off Switches.,
charging 12W
Cable length: 1m
Certified Power adapter: DC 12V 4A
Size: 165*50.5*24mm

DH337

16 ports USB 3.0 HUB

Data transfer: USB 3.0 5Gbps
1-16 ports: Support data transfer and fast charging 12W
Individual On/Off Switches.,
Cable length: 1m
Power adapter: DC 12V 7.5A
Size: 250*50.5*24mm

DH334

7 ports USB 3.0 HUB

Material: Aluminum shell
Data transfer: USB 3.0 5Gbps
1-3 ports: support data transfer
4-7 port: Support data transfer and fast charging 12W Individual
On/Off Switches.
Cable length: 1m
Certified Power adapter: DC 12V 2A
Size: 125*50.5*24mm

DH336

13 ports USB 3.0 HUB

Material: Aluminum shell
Data transfer: USB 3.0 5Gbps
1-13 ports: Support data transfer and fast charging 12W
Individual On/Off Switches.,
Cable length: 1m
Certified Power adapter: DC 12V 7.5A
Size: 210*50.5*24mm



DH338

7 ports USB 3.0 HUB

Material: Aluminum shell
Type C Data Transfer: USB 3.2 Gen 2 10Gbps
USB Data transfer: USB 3.0 5Gbps
1-3 ports: Support data transfer
4-7 ports: Support data transfer and fast charging 12W
Individual On/Off Switches.,
Data cable length: 1m, 1* USB-C/M to A/F adapter is also included.
Certified Power adapter: DC 12V 2A
Size: 125*50.5*24mm



DH339

10 ports USB 3.0 HUB

Material: Aluminum shell
Type C Data Transfer: USB 3.2 Gen 2 10Gbps
USB Data transfer: USB 3.0 5Gbps
1-6 ports: Support data transfer
7-10 ports: Support data transfer and fast charging 12W
Data cable length: 1m, 1* USB-C/M to A/F adapter is also included.
Certified Power adapter: DC 12V 4A
Size: 165*50.5*24mm

multi-screen/Capture Card

CUE12-GRY



4-in-1 HUB

Type-C to HDMI 4K60+HDMI 1080P60Hz*2+PD
HDMI 1: 3840*2160/60Hz; HDMI 2: 1080P/60Hz; HDMI 3: 1080P/60Hz
System Compatibility: Window, MacOS, Android
Fast Charging: PD 3.0, Max 100W Power Adapter

DD605



USB 3.0 HDMI Capture Card

* HDMI - Max input 4K@30Hz
* Output: USB - A 3.0

Video output resolution: Max output can be 1080P@60Hz
Audio Output: 3.5MM 2.0 stereo output
HDMI Loop-out: 1080P@60Hz

CUE76-GRY



16-in-1 HUB

USB A/M to HDMI*2+DP*2+MIC+SPK+USB3.0*4+C Data +SD+TF
+RJ45+DC 12V (Charger included)
HDMI*2+DP*2: 3840*2160/60Hz
(Use only one from the group of HDMI or DP ports)
System Compatibility: Window, MacOS, Android
Data Transfer Speed: Up to 5 Gbps (USB 3.0),
Up to 480 Mbps (USB 2.0)

DD606



9 in 1 hub with USB 3.0 HDMI Capture Card


* HDMI - Max 4K@60Hz
* 3 x USB-C 3.1 (5Gbps)
* 1 x PD 3.0 100W

Capture card:
HDMI resolution: Max input 4K@30Hz
Output: USB - A 3.0
Video output resolution: Max output 1080P@60Hz
Audio Output: 3.5MM 2.0 stereo output
HDMI Loop-out: 1080P@60Hz



4K ULTRAHD

WIRELESS EXTENDER

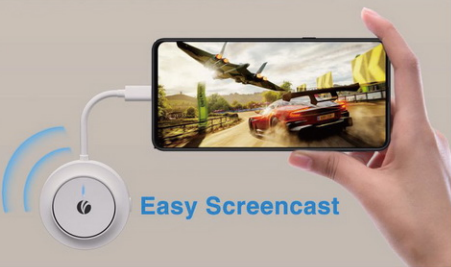

Easy Screencast



Dd543



Wireless Screen Extender

Wireless Screen Extender with plastic case
1 Type C+PD100W wireless TX module
1 HDMI +5V Type C RX module
Maximum transmission distance: 15M
Maximum resolution 3840*2160@4K30Hz

Card Reader



CUE602s



TYPE-CM TO CF+SD/TF4.0 Card

SD4.0: 236MB/S
TF4.0: 220MB/S
CF: 130M/S
GL3230S+LQFP128

Supports three cards that read and write simultaneously at the highest speed standards.
Follow high-speed rhythms with flashing indicator light



CUE603s




TYPE-CM TO CF Express Type-B Card Reader

CF: 700M/S Transfer speed
RTL9210VB

LED lights flash during data reading and writing.

SSD Enclosure Series

Support System : Windows, Mac OS, Linux ,Android



CU850S



SSD Enclosure for M.2 SATA/AHCI protocol 6G

Material: Aluminum+ABS
Interface: USB 3.1 Gen 2 Type-C
Protocol: M.2 SATA
Compatibility: M.2 SATA B Key & (B+M) Key 2280/2260/2242/2230 SSD
Transmission Speed: 5Gbps
Max Capacity: 4TB
Support System: Windows, Mac OS, Linux ,Android
Support UASP & Trim: support



CU850N



SSD Enclosure for M.2 PCI-E NVMe protocol 10G

Protocol: M.2 NVMe
Compatibility: M Key & (M+B) Key 2280/2260/2242/2230 SSD
Transmission Speed: 10Gbps
Max Capacity: 4TB
Support System: Windows, Mac OS, Linux ,Android
Support UASP & Trim: support




CU850SN



SSD Enclosure for M.2 NVMe and SATA dual protocol 10G&6G

Material: Aluminum+ABS
Interface: USB 3.1 Gen 2 Type-C
Protocol: M.2 NVMe & M.2 SATA
Compatibility: M.2 NVMe M Key & (M+B) Key and M.2 SATA (M+B) Key 2280/2260/2242/2230 SSD
Transmission Speed: 10Gbps & 6Gbps
Max Capacity: 4TB
Support System: Windows, Mac OS, Linux ,Android
Support UASP & Trim: support



CU855N



SSD Enclosure for M.2 NVMe

Chip: RTL9210
Material: Aluminum
Interface: USB 3.1 Gen 2 Type-C
Protocol: M.2 NVMe
Compatibility: M.2 NVMe M Key & (M+B) Key
Transmission Speed: 10Gbps
Max Capacity: 4TB
Support System: Windows, Mac OS, Linux ,Android



- Magnetic Design
- Fast heat dissipation
- UASP
- USB-C
- Tool-free installation

- Magnetic Design
- Fast heat dissipation
- UASP
- USB-C
- Tool-free installation

- Fast heat dissipation
- UASP
- USB-C
- Tool-free installation

CU853N
SSD Magnetic Enclosure for M.2 NVMe Protocol 10G
 Interface: Type-C
 Compatibility: M Key & (M+B) Key 2230 SSD
 Transmission Speed: 10Gbps
 Max Capacity: 2TB
 Support System: Windows, Mac OS, Linux, Android
 Support UASP & Trim: support

CU853SN
SSD Magnetic Enclosure for M.2 NVMe and SATA Dual Protocol 10G
 Interface: Type-C
 Compatibility: M Key & (M+B) Key 2230 SSD
 Transmission Speed: 10Gbps
 Max Capacity: 2TB
 Support System: Windows, Mac OS, Linux, Android
 Support UASP & Trim: support

CU854N
TYPE C M TO PD +NVMe SSD Enclosure
 TYPE C M TO PD+NVMe SSD Enclosure with Plastic case, support M.2 NVMe 2230 PD: 100W,SSD transport 10Gbps
 Include 1pc iPhone 15 promax cable and a screw driver



CU855SN-F
 Fingerprint Encryption
 Fast heat dissipation
 UASP
 USB-C
 Tool-free installation
SSD Enclosure for NVMe & SATA
 USB Version USB 3.2 GEN2
 Protocol: NVMe & SATA
 Data Transfer Speed: Up to 10Gbps
 Max Capacity: 8TB
 SSD Compatibility: M.2 NVMe M Key&B+M Key SSD Supported
 SSD SIZE: 2230/2242/2280
 Power Retention Time: < 1s
 LED Indicators Power indicator, Operating status indicator
 Encrypted: Fingerprint Encryption
 Compatible system: Windows, Mac OS, Android
 material Aluminum alloy

CU901SN
 Fast heat dissipation
 UASP
 USB-C
 USB-A
 Tool-free installation
Type c F to M.2 SSD enclosure
 Type c F to M.2 SSD enclosure
 10Gbps+USB3.2*2+1*USB-C-3.2 10G
 Include package and cable NVMe & SATA M.2 SSD Enclosure, USB 3.1 Gen 2 M Key & B&M Key Hard Drive Adapters
 UASP for SSD Size 2280/2280/2242/2230

